

LG MonoX[®] Plus

LG365S2W-A5 | LG360S2W-A5
LG355S2W-A5 | LG350S2W-A5

72 cell

LG MonoX[®] Plus is LG Electronics's high-quality monocrystalline module. The quality is the result of our strong commitment to developing a module to improve benefits for customers. Features of MonoX[®] Plus include durability, convenient installation, and aesthetic exterior.



Key Features



Enhanced Performance Warranty

LG Mono X[®] Plus has an enhanced performance warranty. The initial degradation of cells has -2%, and the annual rate of degradation has fallen -0.55%/yr.



Reduced LID

LG Mono X[®] Plus has reduced the initial degradation of solar cells by applying LG's new LiLY (LID-improvement for Lifetime Yield) Technology, which controls the reaction of Boron and Oxygen, the main cause of LID (Light Induced Degradation)



Improved Product Warranty

As well as the enhanced performance warranty, LG Mono X[®] Plus is covered by product warranty for 12 years.



Light and Convenient

LG Mono X[®] Plus has been carefully designed, it weighs just 21.7kg and has better grips that allow for quick installation.

About LG Electronics

LG Electronics is a global big player, committed to expanding its operations with the solar market. The company first embarked on a solar energy source research program in 1985, supported by LG Group's vast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX[®] series to the market, which is now available in 32 countries. The NeON[®] (previous MonoX[®] NeON), NeON[®]2, NeON[®]2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG Solar's lead, innovation and commitment to the industry.

LG365S2W-A5 | LG360S2W-A5 | LG355S2W-A5 | LG350S2W-A5

LG Mono X[®] Plus

Mechanical Properties

Cells	6 x 12
Cell Vendor	LG
Cell Type	Monocrystalline / P-type
Cell Dimensions	161.7 x 161.7 mm / 6 inches
# of Busbar	4
Dimensions (L x W x H)	2,024 x 1,024 x 40 mm 79.69 x 40.31 x 1.57 in
Front Load	5,400 Pa / 113 psf
Rear Load	2,400 Pa / 50 psf
Weight	21.7kg / 47.84 lb
Connector Type	MC4, JM601A
Junction Box	IP68 with 3 Bypass Diodes
Cables	1,200 mm x 2 ea / 47.24 in x 2 ea
Glass	High Transmission Tempered Glass
Frame	Anodized Aluminium

Certifications and Warranty

Certifications	IEC 61215, IEC 61730-1/-2
	UL 1703
	IEC 61701 (Salt mist corrosion test)*
	IEC 62716 (Ammonia corrosion test)
	ISO 9001
Module Fire Performance	Type 1
Fire Resistance Class	Class C
Product Warranty	12 Years
Output Warranty of Pmax	Linear Warranty**



* In progress

** 1) 1st year : 98% 2) after 2nd year : 0.55%p annual degradation 3) 84.8% for 25 years

Temperature Characteristics

NOCT	[°C]	45 ± 3
Pmpp	[%/°C]	-0.41
Voc	[%/°C]	-0.30
Isc	[%/°C]	0.03

Characteristic Curves

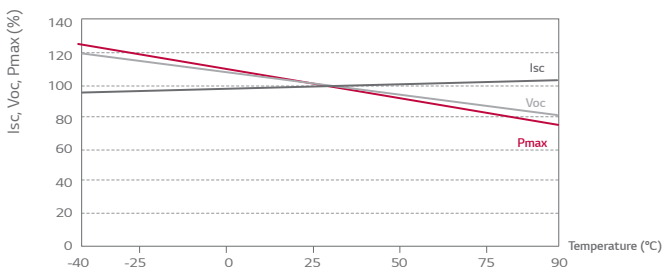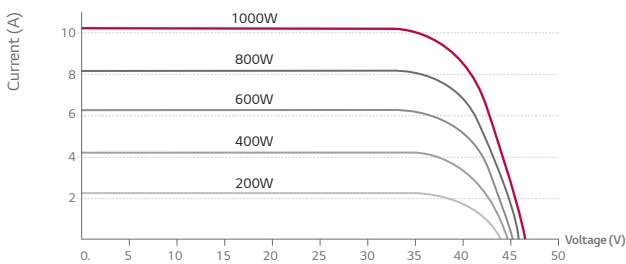

Electrical Properties (STC*)

Model		LG365S2W	LG360S2W	LG355S2W	LG350S2W
		-A5	-A5	-A5	-A5
Maximum Power (Pmax)	[W]	365	360	355	350
MPP Voltage (Vmpp)	[V]	38.0	37.7	37.4	37.1
MPP Current (Impp)	[A]	9.61	9.56	9.50	9.44
Open Circuit Voltage (Voc)	[V]	46.7	46.6	46.4	46.3
Short Circuit Current (Isc)	[A]	10.18	10.12	10.07	10.02
Module Efficiency	[%]	17.6	17.4	17.1	16.9
Operating Temperature	[°C]	-40 ~ +90			
Maximum System Voltage	[V]	1,000(IEC), 1,500(UL)			
Maximum Series Fuse Rating	[A]	20			
Power Tolerance	[%]	0 ~ +3			

* STC (Standard Test Condition): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5



* The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

Electrical Properties (NOCT*)

Model		LG360S2W	LG360S2W	LG355S2W	LG350S2W
		-A5	-A5	-A5	-A5
Maximum Power (Pmax)	[W]	268	264	260	257
MPP Voltage (Vmpp)	[V]	34.9	34.6	34.3	34.0
MPP Current (Impp)	[A]	7.67	7.63	7.58	7.54
Open Circuit Voltage (Voc)	[V]	43.3	43.2	43.0	42.9
Short Circuit Current (Isc)	[A]	8.19	8.14	8.10	8.06

* NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/s

Dimensions (mm / inch)

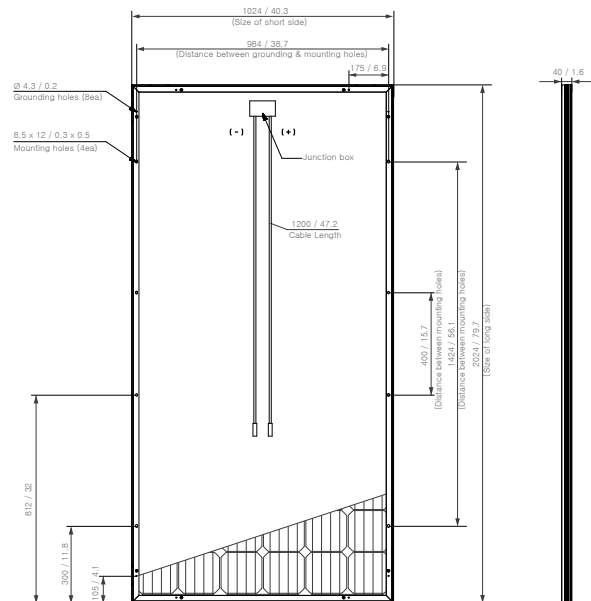

* The distance between the center of the mounting/grounding holes.

